Symphony Gardens Planting S1				
Latin Name	Abbreviation	Pot Size	Density	Quantity
Alchemilla mollis	Al m	2l	7/m2	256
Anemone x hybrida 'Honorine Jobert'	An h HJ	2l	5/m2	133
Aruncus 'Horatio'	Ar H	2l	5/m2	64
Asplenium scolopendrium	As s	2l	7/m2	86
Crocosmia 'Lucifer'	Cr L	2l	5/m2	48
Deschampsia cespitosa	De c	2l	5/m2	84
Dicentra spectabilis 'Alba'	Ds A	2l	5/m2	35
Epimedium 'White Hart'	Ep WH	2l	7/m2	91
Euphorbia amygdaloides 'Robbiae'	Eu a R	2l	7/m2	229
Euphorbia wulfenii	Eu w	2l	5/m2	55
Fatsia japonica	Fa j	2l	5/m2	56
Galium odoratum	Ga o	1l	10/m2	158
Geranium macrorrhizum 'White-ness'	Ge m WN	5l	5/m2	242
Hakonechloa macra	Ha m	2-3l	5/m2	342
Helenium 'Loysder Wieck'	He LW	2-3l	5/m2	35
Helenium 'Rubinzweg'	He R	2-3l	5/m2	38
Helleborus argutifolius	He a	2-3l	5/m2	30
Heuchera 'Green Spice'	He c G	2l	7/m2	123
Libertia grandiflora	Li g	2l	7/m2	53
Lunaria redviva	Lu r	5l	9/m2	137
Luzula nivea	Lu n	5l	5/m2	103
Matteuccia struthiopteris	Ma s	2-3l	7/m2	67
Melica ciliata	Me c	2l	7/m2	151
Miscanthus sinensis 'Yakushima Dwarf'	Mi s YD	5l	3/m2	55
Monarda 'Scorpion'	Mo S	2l	5/m2	49
Pachysandra terminalis	Pa t	1l	10/m2	188
Panicum virgatum 'Heavy Metal'	Pa v HM	2l	5/m2	65
Persicaria amplexicaulis 'Alba'	Pe a A	2-3l	5/m2	36
Persicaria amplexicaulis 'Firedance'	Pe F	2-3l	5/m2	87
Persicaria amplexicaulis 'Orange Field'	Pe OF	2-3l	5/m2	35
Polystichum setiferum 'Herrenhausen'	Po s	1l	5/m2	123
Salvia caradonna	Salv	5l	5/m2	47
Sanguisorba Alba	Sa A	2-3l	7/m2	46
Sanguisorba Lilac Squirell	SLS	2-3l	5/m2	55
Sanguisorba Tanna	Sa T	2-3l	5/m2	38
Skimmia japonica 'Fragrans'	Sk j F	5l	5/m2	63
Veronica longifolia 'Pink Eveline'	Ve l PE	2-3l	5/m2	70
Viburnum davidii	Vi d	2l	7/m2	47
Bulb Layer				
Galanthus nivalis	Ga N	5/6cm	30/m2	1225
Narcissus 'Actaea'	Na A	14/16cm	10/m2	313
Narcissus obvallaris	Na o	14/16cm	10/m2	133
Tulipa acuminata	Tu a	14/16cm	10/m2	271


Ornamental Planting S2				Column1
Latin Name	Abbreviation	Pot Size	Density	Quantity
Anemone x hybrida 'Honorine Jobert'	An h HJ	2l	5/m2	29
Angelica sylvestris	An s	2-3l	3/m2	36
Asplenium scolopendrium	As s	2l	7/m2	91
Briza media	Br m	5l	6/m2	78
Carex 'Ice dance'	Ca ID	5l	5/m2	79
Deschampsia cespitosa	De c	2l	5/m2	36
Fatsia japonica	Fj	10l	1/m2	8
Geranium macrorrhizum 'White-ness'	Ge m WN	5l	5/m2	61
Gillenia trifoliata	Gi t	5l	7/m2	73
Lunaria redviva	Lu r	5l	9/m2	69
Luzula nivea	Lu n	5l	5/m2	14
Matteuccia struthiopteris	Ma s	2l	7/m2	70
Persicaria bistorta 'Superba'	Pe b S	5l	5/m2	42
Polystichum setiferum 'Herrenhausen'	Po s	5l	5/m2	24
Tellima grandiflora	Te g	5l	5/m2	51
Tiarella cordifolia	Ti c	2l	9/m2	121
Climbers				
Jasminum polyanthum	Ja p	175-200cm	Trellis: Several Shoots: 5 brks: C	8
Lonicera tellemaniana	Lt	10l	3/m2	8

SUDS Planting S3				Column1
Latin Name	Abbreviation	Pot Size	Density	Quantity
Ajuga reptans 'Catlin's Giant'	Aj r CG	2l	7/m2	284
Alchemilla mollis	Al m	2l	7/m2	148
Anemanthele lessoniana	An l	2l	5/m2	65
Anemone x hybrida 'Honorine Jobert'	An h HJ	2l	5/m2	52
Aquilegia vulgaris	Aq v	1l	3/m2	42
Asplenium scolopendrium	As s	2l	7/m2	73
Carex 'Ice dance'	Ca ID	5l	5/m2	18
Deschampsia cespitosa	De c	2l	5/m2	69
Eupatorium cannabinum	Eu c	2l	5/m2	9
Euphorbia palustris	Eu p	2l	5/m2	58
Geranium 'Roazanne'	Ge R	2l	5/m2	166
Lunaria redviva	Lu r	5l	9/m2	135
Luzula nivea	Lu n	5l	5/m2	170
Lythrum salicaria	Ly s	5l	5/m2	45
Molinia caerulea 'Hedebraut'	Mo c H	5l	5/m2	47
Molinia 'Poul Petersen'	Mo PP	5l	5/m2	80
Persicaria affinis 'Darjeeling Red'	Pe a DR	1l	10/m2	216
Persicaria bistorta 'Superba'	Pe b S	5l	5/m2	130
Polystichum setiferum 'Herrenhausen'	Po s	5l	5/m2	44
Tiarella cordifolia	Ti c	2l	9/m2	97
Veronicastrum v. 'Roseum'	Ve v R	2l PG	1/m2	21

Buffer Planting S4				Column1
Latin Name	Abbreviation	Pot Size	Density	Quantity
Asplenium scolopendrium	As s	2l	7/m2	155
Deschampsia flexuosa 'Tatra Gold'	De f TG	5l	7/m2	38
Euphorbia amygdaloides 'Purpurea'	Eu a P	2l	7/m2	138
Euphorbia amygdaloides 'Robbiae'	Eu a R	2l	7/m2	159
Fatsia japonica	Fj	2-3l	5/m2	7
Foeniculum vulgare	Fo v	5l	1/m2	18
Geranium macrorrhizum 'White-ness'	Ge m WN	5l	5/m2	145
Hedera helix 'Arborescens'	Hh A	5l	7/m2	94
Luzula nivea	Lu n	5l	5/m2	167
Mahonia eurybracteata	Ma e	5l	7/m2	206
Miscanthus sinensis 'Flamingo'	Mi s F	5l	5/m2	46
Miscanthus sinensis 'Yakushima Dwarf'	Mi s YD	2l	3/m2	20
Molinia caerulea 'Hedebraut'	Mo c H	5l	5/m2	59
Pachysandra terminalis	Pa t	1l	10/m2	438
Ruscus aculeatus	Ru a	5l	5/m2	300
Sarcococca confusa	Sa c	5l	5/m2	285
Skimmia japonica 'Fragrans'	Sk j F	5l	5/m2	154
Stipa tenuissima	St t	2l	9/m2	57
Verbena bonariensis	Ve b	2l	1/m2	13
Verbena bonariensis 'Lollipop'	Ve b L	2l	2/m2	29
Viburnum davidii	Vi d	2l	7/m2	34

Groundcover Planting S5				Column1
Latin Name	Abbreviation	Pot Size	Density	Quantity
Epimedium 'White Hart'	Ep WH	2l	7/m2	18
Erigeron karvinskianus	Er K	1l	10/m2	103
Galium odoratum	Ga o	1l	10/m2	22
Pachysandra terminalis	Pa t	1l	10/m2	28
Primula vulgaris	Pr v	9cm	10/m2	25
Bulb Layer				
Galanthus nivalis	Ga N	5/6cm	30/m2	58
Narcissus 'Actaea'	Na A	14/16cm	10/m2	5
Narcissus obvallaris	Na o	14/16cm	10/m2	12

Climbers to Sub-station Fence				Column1
Latin Name	Abbreviation	Height	Density	Quantity
Hydrangea anomala subsp. Petiolaris	HaP	10L 150-200cm	Several Shoots: 3/4 brks: 1/linear m	12
Lonicera periclymenum	Lp	10L 150-200cm	Several Shoots: 3/4 brks: 1/linear m	6

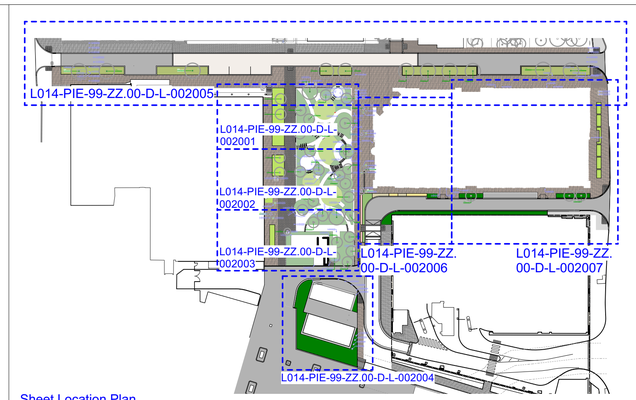

Sheet Location Plan



© THIS DRAWING IS COPYRIGHT PROTECTED AND MAY NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN AUTHORITY FROM THE OWNER.

NOTES:
1. Do not scale from this drawing.
2. Always work to noted dimensions.
3. All dimensions are in millimetres unless otherwise stated.
4. All setting out, levels and dimensions to be agreed on site.
5. The dimensions of all materials must be checked on site before being laid out.
6. This drawing must be read with the relevant specification clauses and detail drawings.
7. Order of construction and setting out to be agreed on site.

Revision Notes 15/05/2025
1 - Raised planters to Princess St updated due to clash with underground services
2 - Bee sculpture foundation updated to match manufacturer requirements
3 - Planting to existing above ground substation facing Symphony Gardens removed due to clash with existing, shallow depth underground services. Existing macadam surfacing to be retained.

NOTE: Planting numbers updated as plants have been redistributed due to updates listed above

Revision	Date	Description	Drawn	Apprvd.
C03	15/05/25	Stage 05 updates. See revision note.	VE	RM
C02	07/04/25	Planting bed extended to avoid clash with draw pits	VE	RM
C01	10/12/24	Stage 05 Issue	VE	RM

PLANIT
Manchester | London | Liverpool | Leeds | Standish
Manchester
2 Back Grafton Street, Altrincham, Cheshire, WA14 1DY,
W: planit-ie.com
E: info@planit-ie.com
T: 0151 363 1230

Client Bruntwood

Project No 3 Circle Square, Manchester

Drg Title Detailed Planting Plan 3 of 7

Created on	Created by	Approved by
02-08-22	FF	RM

Scale	Size	Workstage	Status
1:50	A1	Constr.	Information

Drg No.	Suitability	Revision
L014-PIE-99-ZZ.00-D-L-002003	S4	C03

© Planit I.E. Limited