



Existing Entrance Elevation
Scale @ 1:20





Proposed Entrance Elevation
Scale @ 1:20

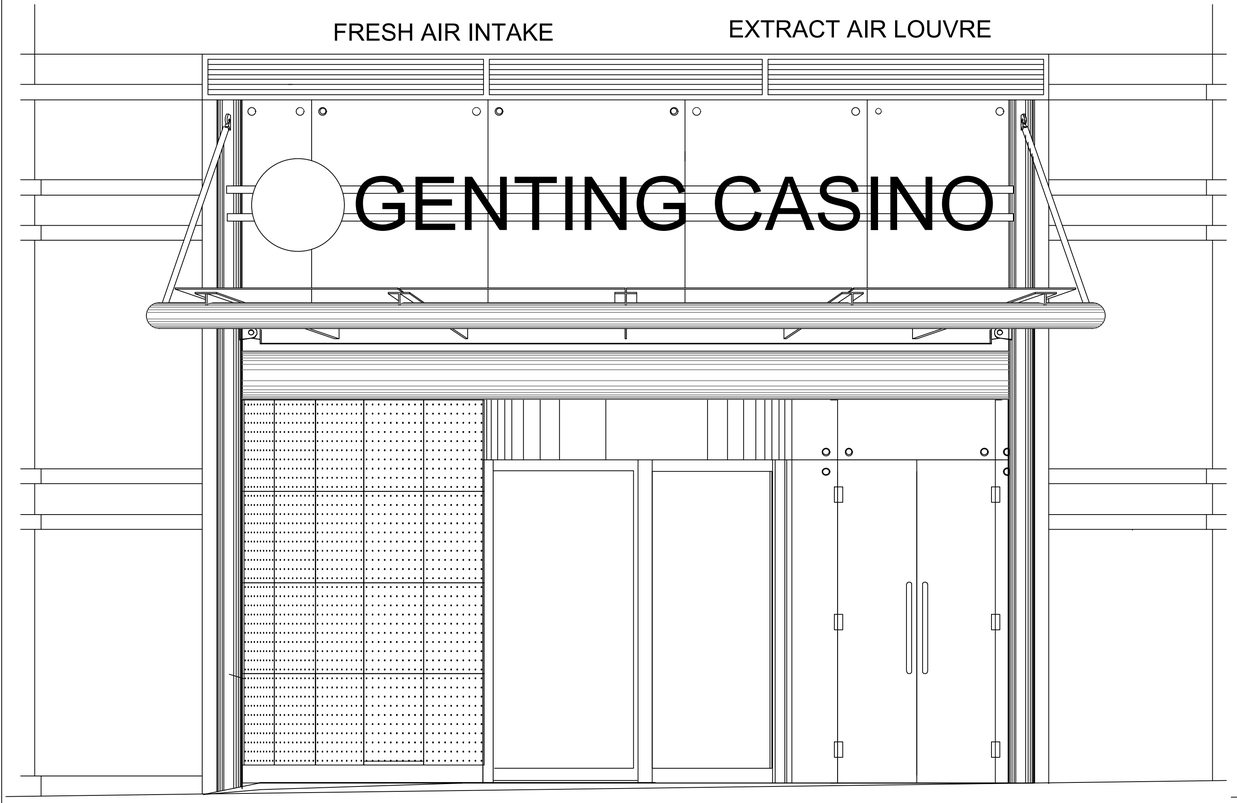

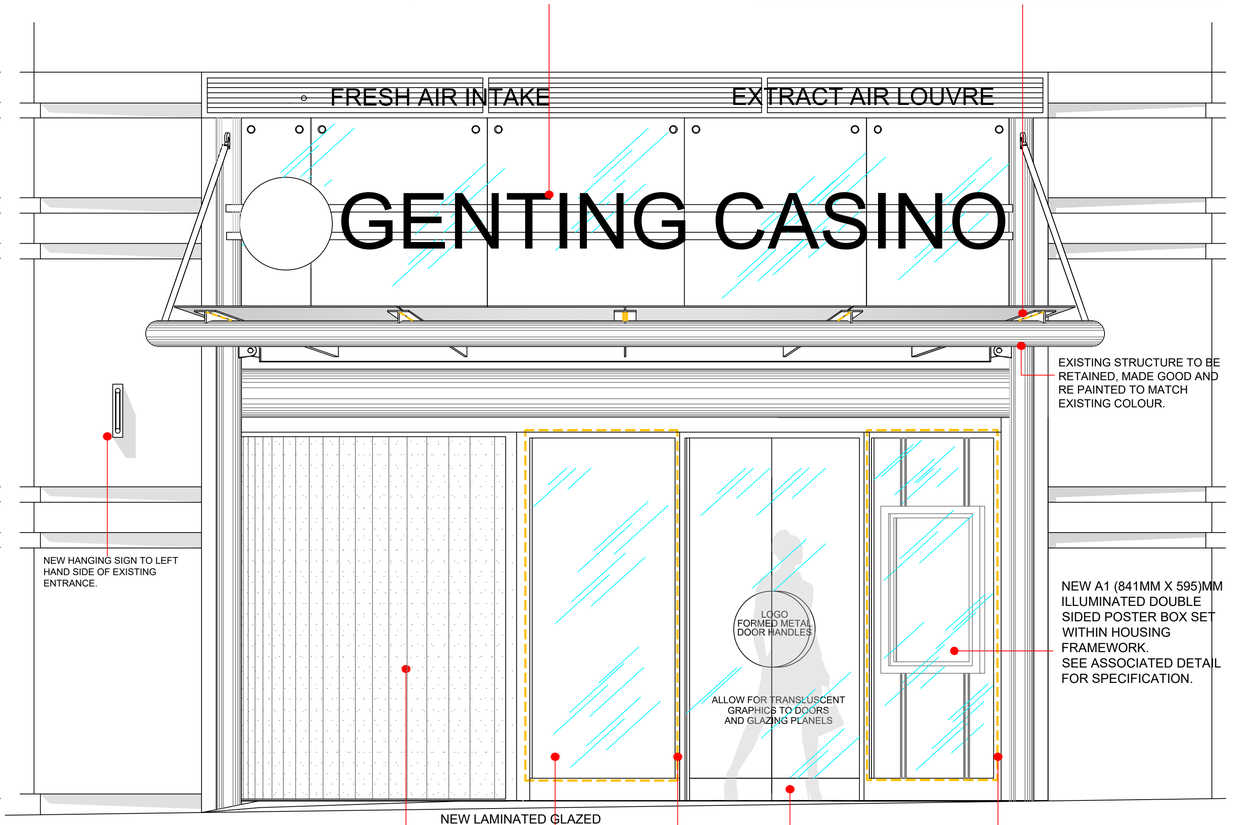


PROPOSED DESIGN INTENT



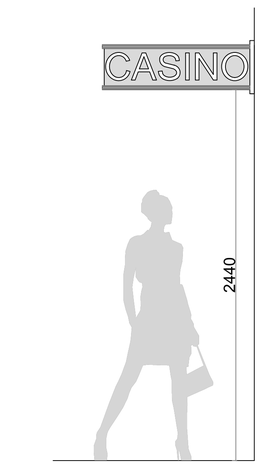

Oxford Street
Proposed Hanging Sign
Scale @ 1:20

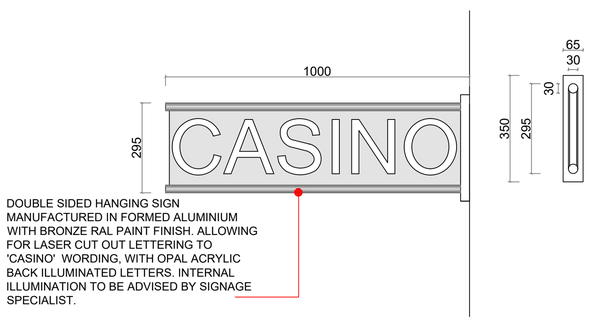

DOUBLE SIDED HANGING SIGN MANUFACTURED IN FORMED ALUMINIUM WITH BRONZE RAL PAINT FINISH. ALLOWING FOR LASER CUT OUT LETTERING TO 'CASINO' WORDING, WITH OPAL ACRYLIC BACK ILLUMINATED LETTERS. INTERNAL ILLUMINATION TO BE ADVISED BY SIGNAGE SPECIALIST.

Oxford Street
Proposed Hanging Sign
Scale @ 1:10



DESIGN INTENT

IMPORTANT NOTE

This drawing has been prepared from existing unchecked survey information provided by the client.
All dimensions to be checked on site and any discrepancies reported to designer prior to proceeding.Figured dimensions where given to take precedence over scaled or site dimensions.

REV:	DESCRIPTION:	DATE:
B	SCALE OF ELEVATIONS AMENDED.	22.11.24
C	PROPOSED SIGN TO BE LOCATED IN EXISTING POSITION; RETAIN EXISTING FIXINGS, REPLACE SIGN ONLY.	13.12.24
D	EXTERNAL ENTRANCE PROPOSAL AMENDED IN LINE WITH MCC RECOMMENDATIONS.	08.10.25
E	UPDATE LAYOUT/ ELEVATIONS. ADDITION OF SPECIFICATION AND INFORMATION.	24.11.25
F	REMOVE DIGITAL DISPLAY & REPLACE WITH ILLUMINATED POSTER BOX (A1).	19.01.26

ALL DIMENSIONS TO BE CHECKED ON SITE BEFORE ANY WORK COMMENCES ANY DISCREPANCIES TO BE REPORTED TO THE SUPERVISING DESIGNER

PROJECT:	GENTING MANCHESTER			INFORMATION:	
TITLE:	EXISTING AND PROPOSED LOBBY ELEVATION			COMMENT:	
CLIENT:	GENTING CASINO'S	SCALE:	1:20 @ A1	APPROVAL:	
DATE:	22.10.2024	DRAWN BY:	AJ	TENDER:	
DRAWING NO::	5601-024-102	REVISION:	F	CONSTRUCTION:	

DAKOTA
HOUSE OF DESIGN
1 DINSDALE PLACE
SANDYFORD
NEWCASTLE UPON TYNE
NE2 1BD
UNITED KINGDOM
WWW.DAKOTAHOUSEOFDESIGN.COM T:+44(0)191 2610261