


SIGNAGE 4 - GOLD DOUBLE LINED LETTERS "BAR ELEGANZA Gigi" VINYL APPLIED INTERNALLY TO WINDOW GLAZING.


1 PROPOSED JACKSON ROW EXTERNAL WINDOW VINYL SIGNAGE DETAIL 4
Scale: 1:10@A1 / 1:20@A3

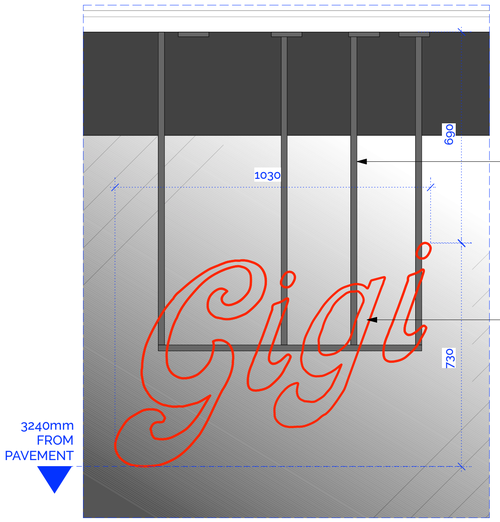

STEEL FIXING FIXED TO EXISTING MASONRY THROUGH EXISTING MORTAR JOINTS. POWER FEED TO BE INCORPORATED WITH IN FRAMEWORK.

RED NEON INDIVIDUAL LETTERS "Gigi" FIXED TO FRAMEWORK.


2 PROPOSED JACKSON ROW EXTERNAL NEON MAIN SIGNAGE DETAIL 5
Scale: 1:10@A1 / 1:20@A3

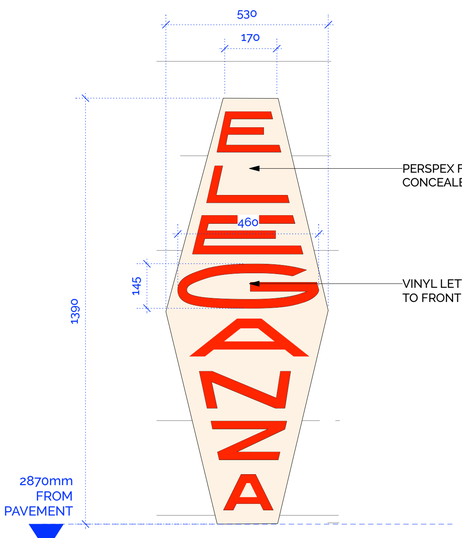

PERSPEX FRONT RAL 9001 WITH CONCEALED LIGHT SOURCE WITHIN

VINYL LETTERS "ELEGANZA" APPLIED TO FRONT OF SIGNAGE RAL 3024

3 PROPOSED JACKSON ROW PROJECTING SIGN FRONT ELEVATION
Scale: 1:10@A1 / 1:20@A3

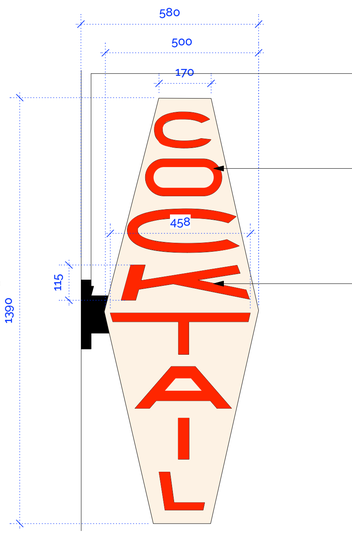

STEEL FIXING FIXED TO EXISTING MASONRY THROUGH EXISTING MORTAR JOINTS. POWER FEED TO BE INCORPORATED WITH IN FRAMEWORK.

PERSPEX FRONT RAL 9001 WITH CONCEALED LIGHT SOURCE WITHIN

VINYL LETTERS "COCKTAIL" APPLIED TO BOTH SIDES OF SIGNAGE RAL 3024

4 PROPOSED JACKSON ROW PROJECTING SIGN SIDE ELEVATION
Scale: 1:10@A1 / 1:20@A3

GENERAL NOTES:

ALL DIMENSIONS TO BE CHECKED ON SITE AND ANY DISCREPENCIES TO BE REPORTED TO RSS

ALL FINISHES, SAMPLES AND MOCK UPS TO BE APPROVED BY RSS PRIOR TO MANUFACTURE

FOR FINISHES REFER TO FINISHES SCHEDULE

REFER TO RSS SPEC INDEX FOR LIST OF ALL FF&E ITEMS

ALL EXISTING FURNITURE TO BE REMOVED UNLESS STATED OTHERWISE BY THE CLIENT

REVISIONS:

CODE:	DATE:	DESCRIPTION:
P1	12.05.26	FIRST ISSUE
P2	28.05.26	PLANNING ISSUE
P3	11.06.26	SIGNAGE UPDATED

RussellSageStudio
St Michael's House | 2 Elizabeth Street | London | SW1W 9RB | T. +44 (0) 20 7730 3258
russellsagestudio.co.uk

THIS DRAWING IS THE PROPERTY OF RUSSELL SAGE STUDIO. COPYRIGHT IS RESERVED TO THEM AND THE DRAWING IS ISSUED ON THE CONDITION THAT IT IS NOT COPIED EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OR RUSSELL SAGE STUDIO.

- ALL DIMENSIONS, DRAWINGS AND SPECIFICATIONS ARE TO BE VERIFIED ON SITE BY THE CONTRACTOR AND ANY DISCREPANCIES REPORTED TO RSS PRIOR TO THE COMMENCEMENT OF WORK.
- THIS PLAN HAS BEEN EXTRACTED FROM SUPPLIED DRAWINGS AND HENCE IS SUBJECT TO SURVEY AND CONTRACTOR SETTING OUT PLAN.
- CONTRACTOR TO TAKE RESPONSIBILITY AND ENSURE ALL CONSTRUCTION METHODS, TECHNIQUES, FITTINGS AND FINISHES ETC CONFORM TO THE REQUIRED BUILDING REGULATIONS IN THE APPLICABLE COUNTRY, AND TO THE RELEVANT BUILDING CONTROL OFFICERS SATISFACTION.
- ALL SPECIFIED ITEMS ARE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURES RECOMMENDATIONS.
- ALL FINISHES ARE TO BE CARRIED OUT TO A HIGH STANDARD.

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT CONSULTANTS DRAWINGS. ALL REQUESTED DRAWINGS SHOWING FIXINGS AND CONSTRUCTION DETAILS TO BE APPROVED BY RSS PRIOR TO COMMENCEMENT OF WORK. CONTRACTORS TO CHECK AND APPRAISE DESIGN, FITTING OUT AND CONSTRUCTION DETAILS AND OFFER SUITABLE ALTERNATIVES TO THE DESIGNERS FOR APPROVAL PRIOR TO MANUFACTURE AND INSTALLATION. CONTRACTOR TO PROVIDE A SUITABLE WORKING ENVIRONMENT WHICH CONFORMS TO THE CURRENT HEALTH AND SAFETY CONDITIONS AND LOCAL AUTHORITY REGULATIONS.

DRAWING STATUS:
FOR INFORMATION

CLIENT:
JAMIE BARBER

PROJECT NO:	PROJECT:
5402	GUSTO, MANCHESTER

DATE:	DRAWN:	CHECKED:	SCALE:
MAY 26	VR	LR	1:10 @ A1 1:20 @ A3

TITLE:
PROPOSED EXTERNAL JACKSON ROW SIGNAGE DETAILS

DWG. NO: **5402-DE-02** REV: **P3**