CARTWRIGHT PICKARD

Cambridge Halls
Planning Report - Additional Materials

Prepared by: James Butler
CAM-CPA-ZZ-ZZ-RP-A-009059
Stage 4 Issue

11 August 2026


Document history

Revision	Reason for Issue	Date	Prepared by	Checked by
P01	Stage 4 Issue	11/08/2026	JB	CP

Perforate Panels

Description;

- Located to sides of window assembly
- Opening light (to 90 deg.) behind to provide ventilation requirements
- Barrier loading requirement in line with Approved Document Part K

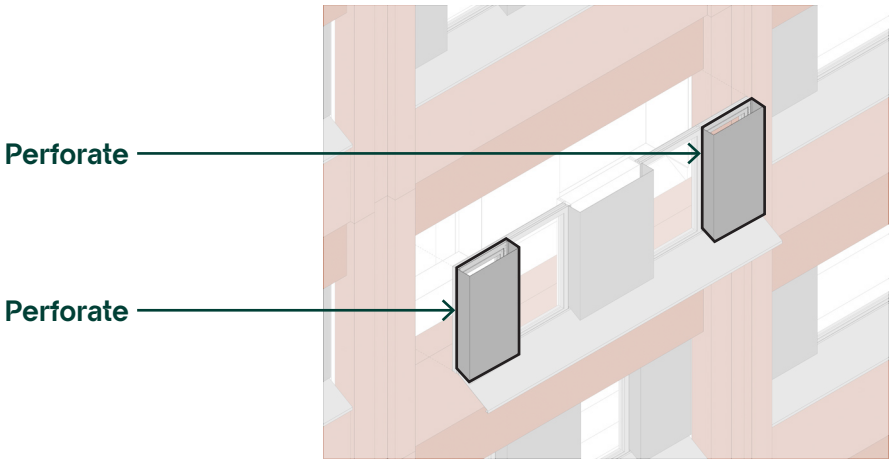




Note: Pattern intent, panel in mill finish




Central Patterned Panels


Description;

- Located only between adjoining cluster bedrooms as shown on elevations. 1no. solid anodised panel. Assists weathering.
- 2no. finishes proposed - Natural Silver to pattern (pronounced) & Medium Blue Grey to background (recessed)

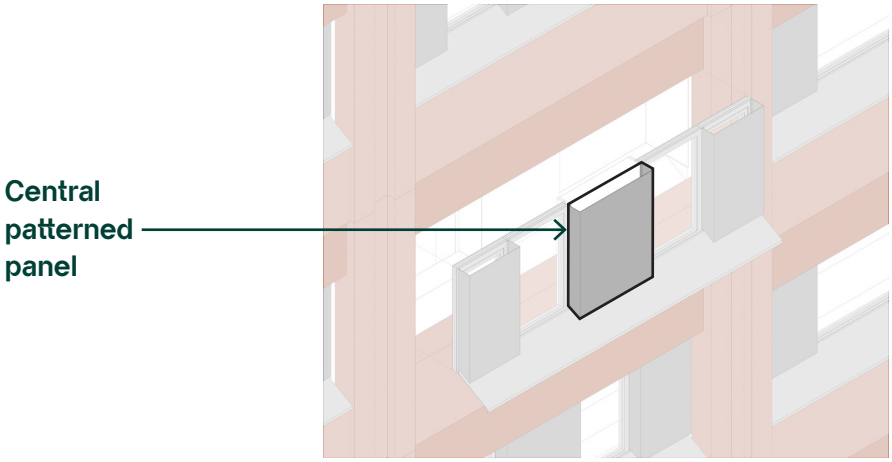

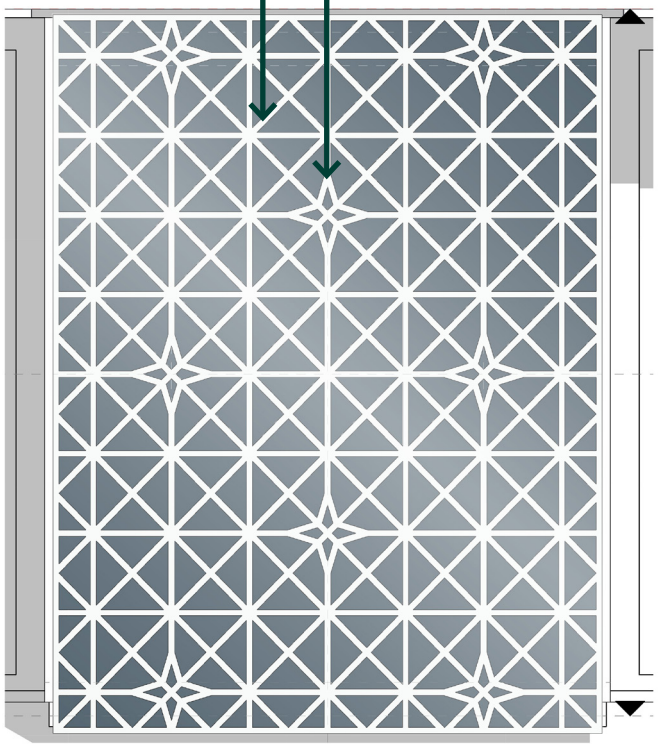

Visual of central pattern panel

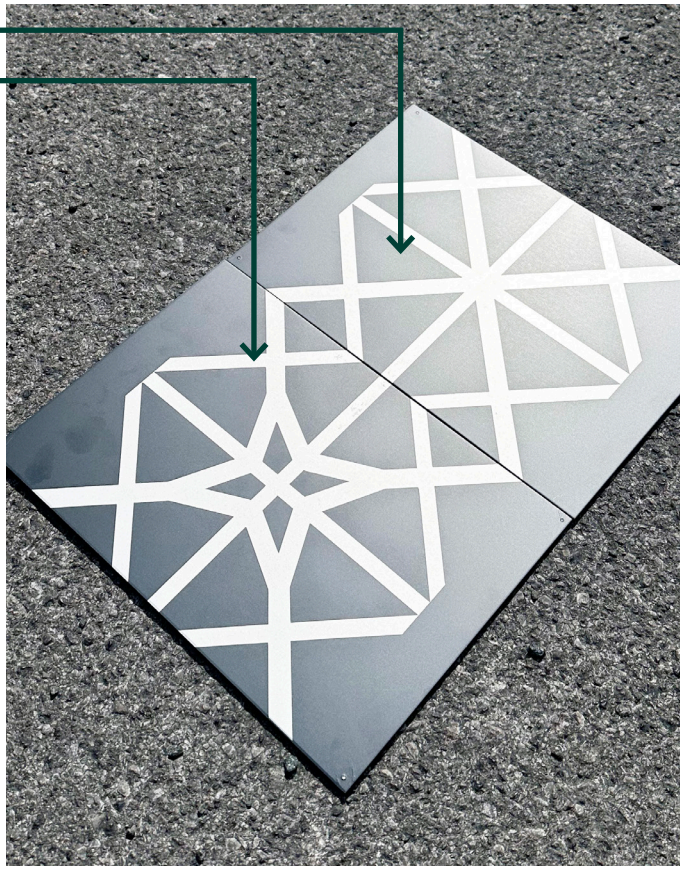



Note: Pattern setting out as per drawing on left

Window Frames, Cills & Pressings

Description;

- As clarified in CAM-CPA-ZZ-ZZ-RP-A-009058 & CDN/26/0344 discharge
- Anodic PPC finish to window frames, cills and pressings - background element as requested by MCC

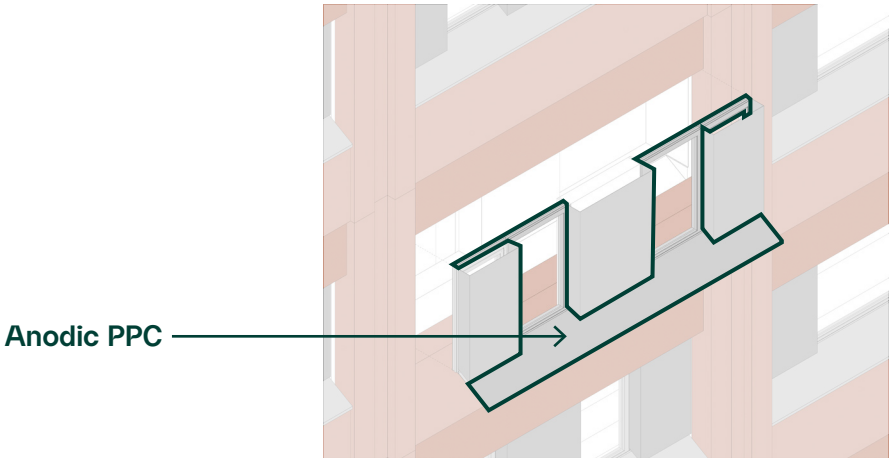

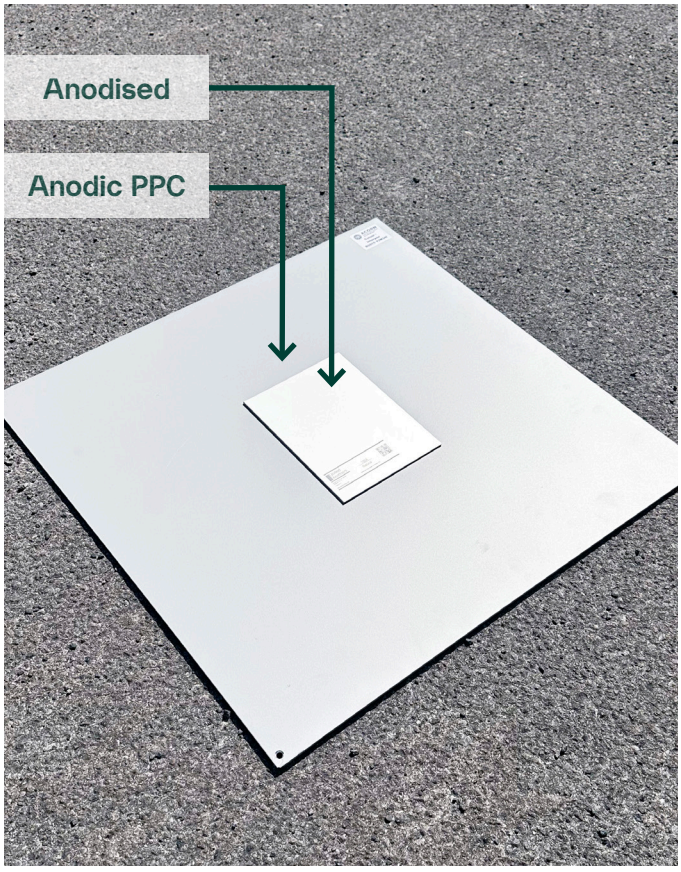

Material Samples received





Long range visual test, Anodic PPC blends into background

Window Panels

Description;

- As clarified in CAM-CPA-ZZ-ZZ-RP-A-009058 & CDN/26/0344 discharge
- Anodised finish to reduce materials & read as family

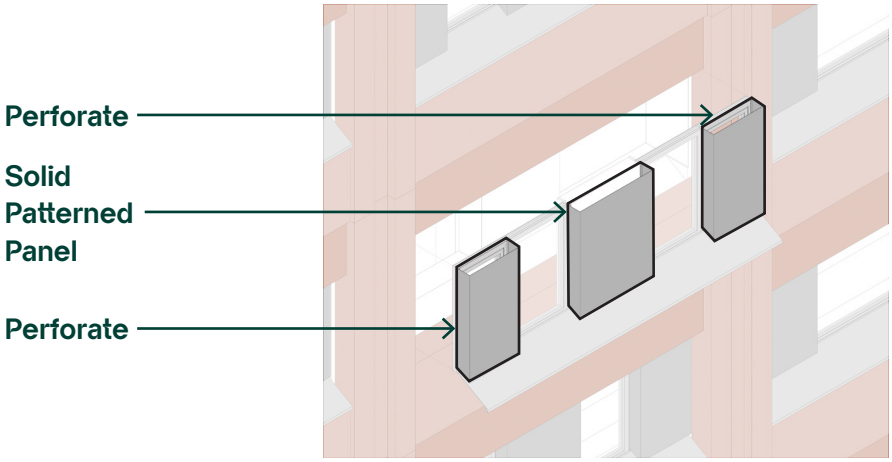

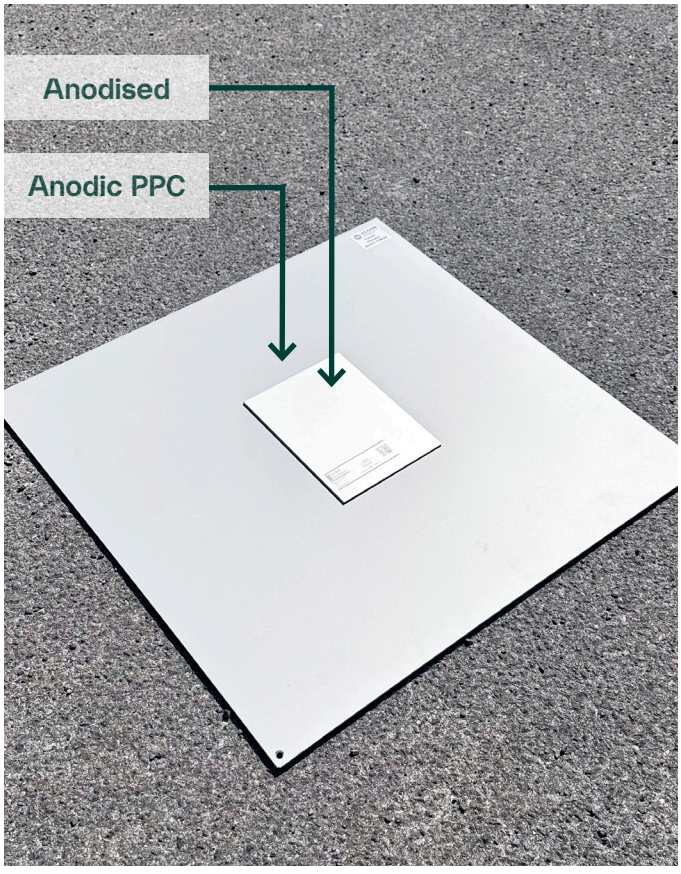

Material Samples received



Long range visual test, Anodic PPC blends into background

CARTWRIGHT PICKARD

cartwrightpickard.com

cartwrightpickard

@CartPickArch

London Studio
1 Canal Side Studios
8–14 St Pancras Way
London NW1 0QG
T 020 7554 3830

Manchester Studio
Unit 310, Ducie House
Ducie Street
Manchester M1 2JW
T 0161 914 7444

Leeds Studio
Studio 4, Cross York Street Studios
Cross York Street
Leeds LS2 7BL
T 0113 360 9444