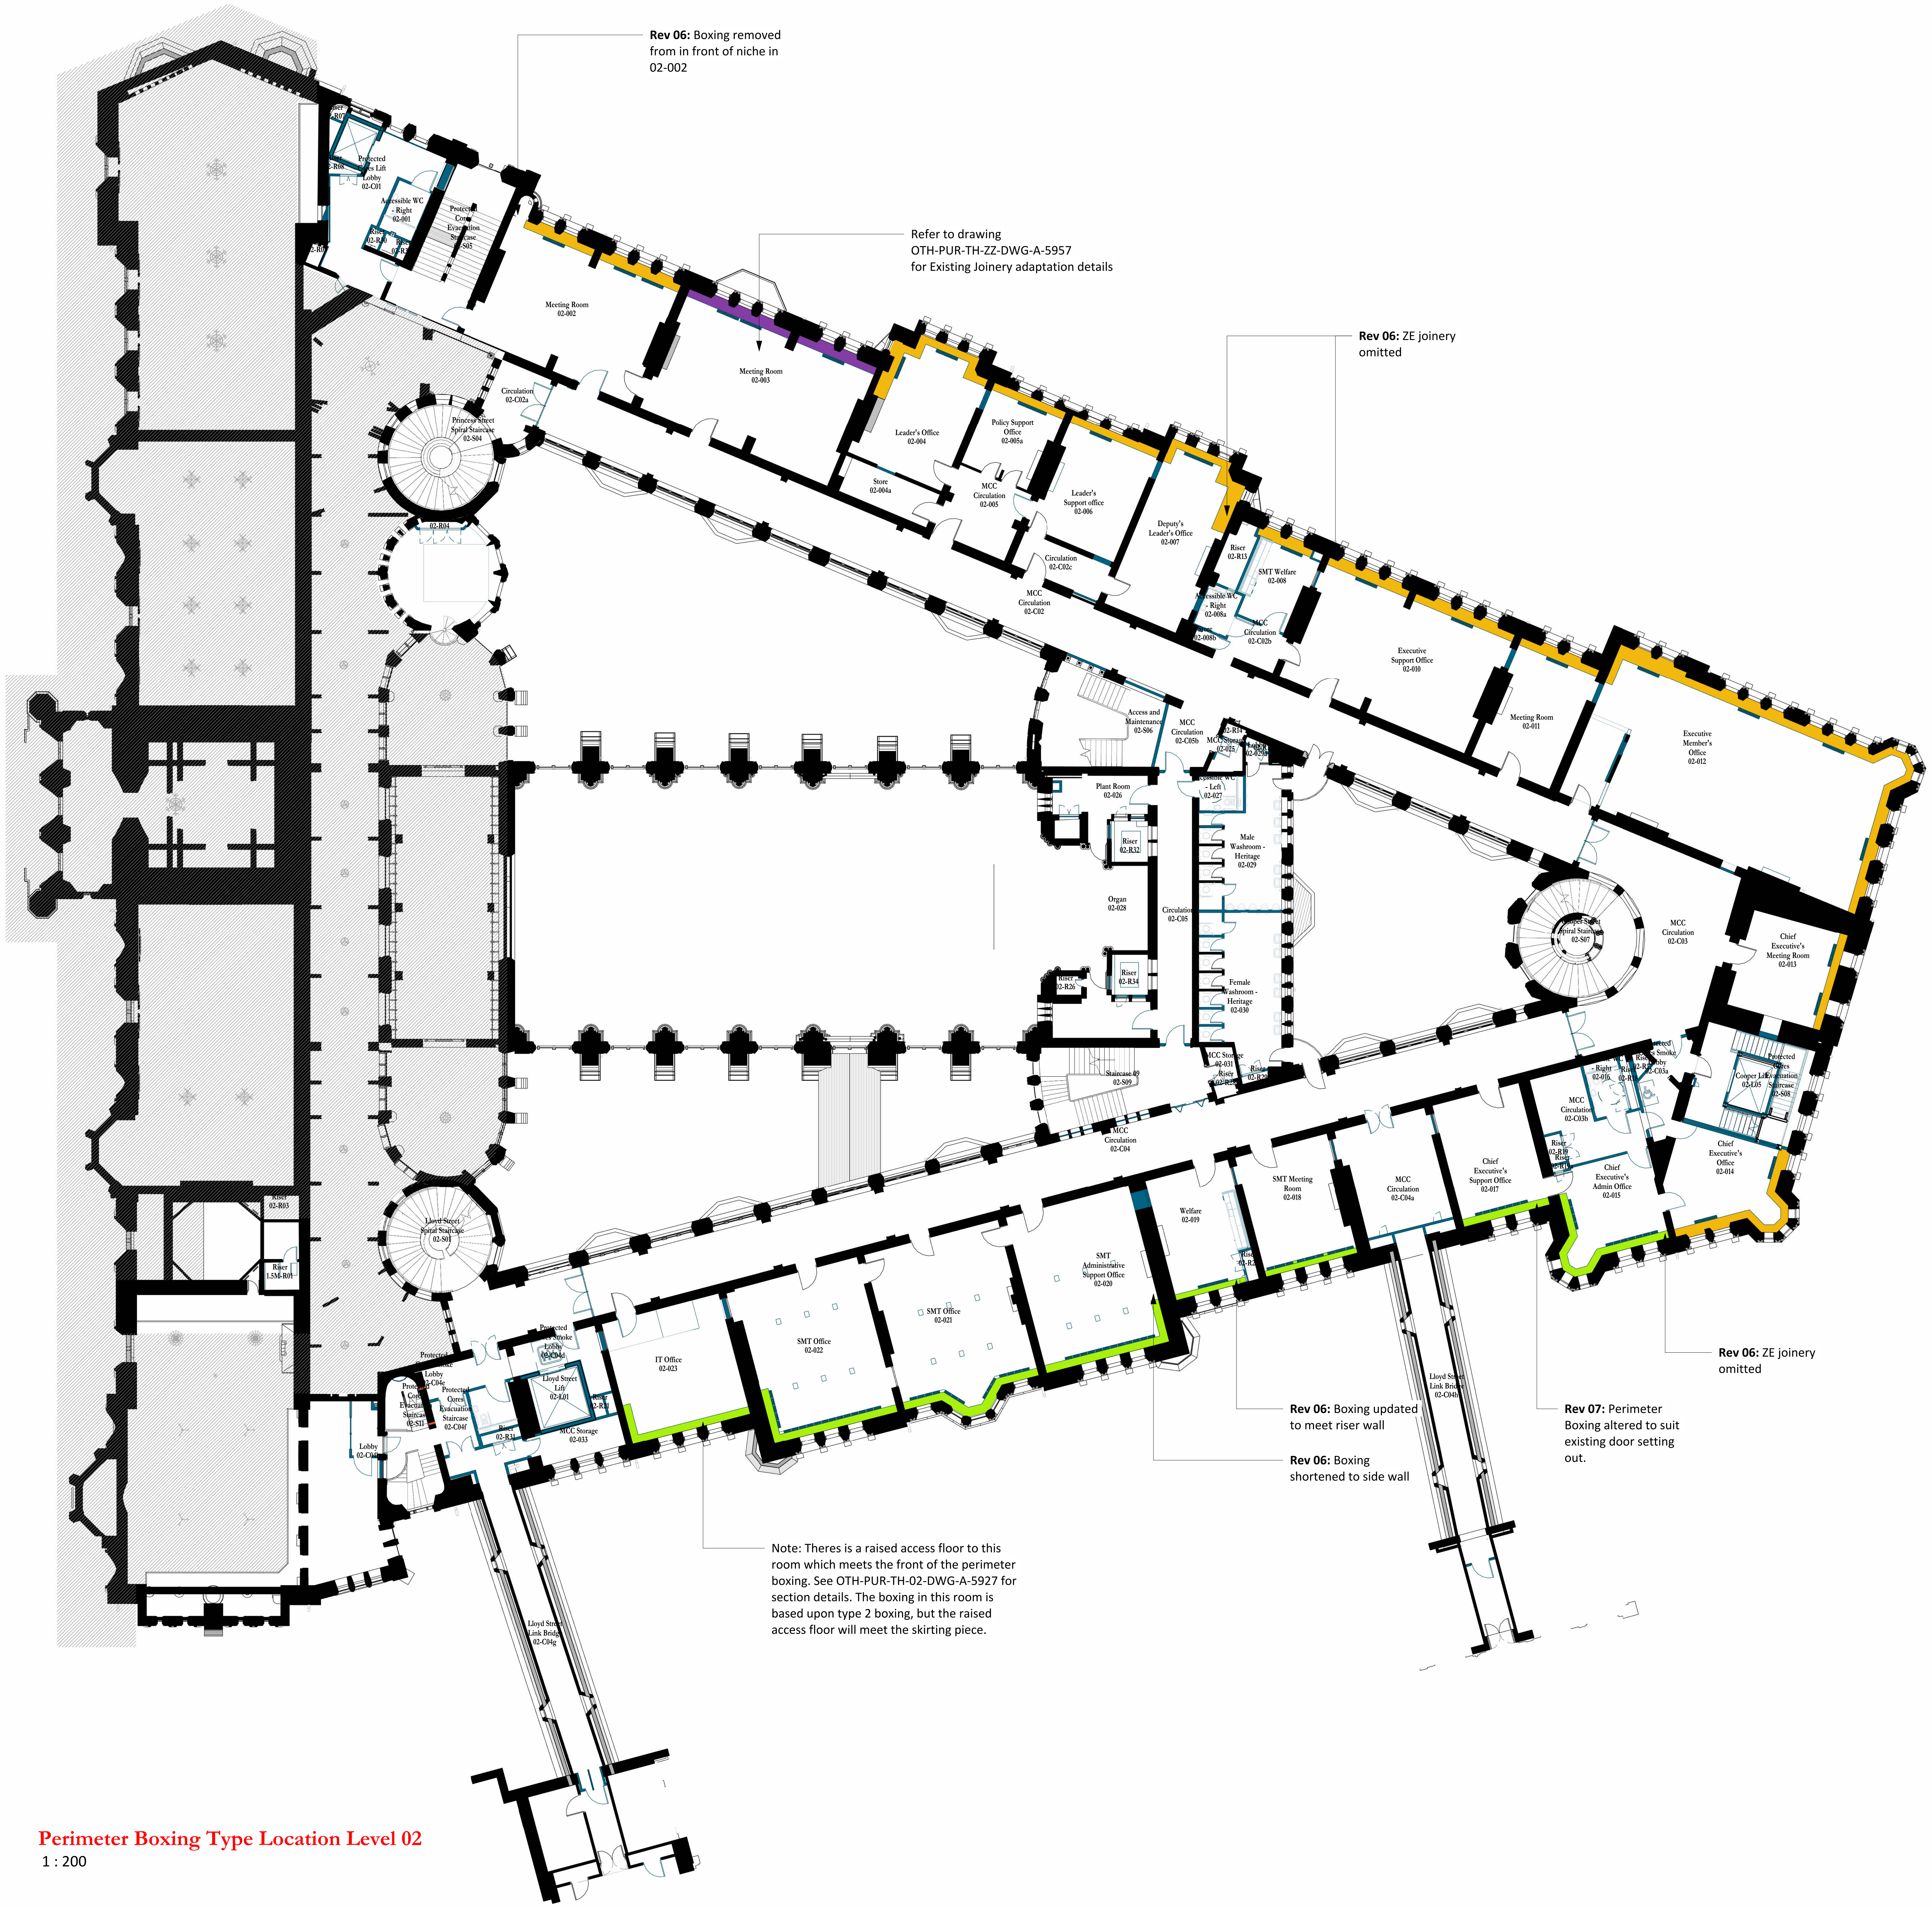


Perimeter Boxing Type Location Level 02

1 : 200

Type 01 - FCU - OTH-PUR-TH-ZZ-DWG-A-5920

Type 02 - Finned Tube - OTH-PUR-TH-ZZ-DWG-A-5921

Type 03 - Level 06, boxing wihin Eaves - OTH-PUR-TH-ZZ-DWG-A-5922

Type 04 - Welfare - OTH-PUR-TH-ZZ-DWG-A-5923

Type 05 - Box-in-Box Kitchen - OTH-PUR-TH-ZZ-DWG-A-5924

~~**Type 06** - ZE Box~~

Type 07 - Heritage Boxing to be altered - See references on layouts

Type 08 - Heritage Rooms - Services below FFL with trench heaters

Type 09 - Storage Rooms - Unistrut framing only

Type 10 - Heating Pipes fixed on floor or wall - WPC to submit design for services fixing methodology. May wish to continue using unistrut module.

Type 11 - Slimline version of type 1 FCU boxing. See OTH-PUR-TH-GF-DWG-5989 for details.

Type 12 - Boxing to dormer windows on Level 05. See OTH-PUR-TH-05-DWG-A-6410 for details.

Type 13 - Low level skirting boxing detail to suit existing skirting profile type. See OTH-PUR-TH-03-DWG-A-5996 for details.

Type 13a For existing 375mm high skirting

Type 13b For existing 220mm high skirting

Type 14 - Boxing principles based on type 2, but no finned tubes are present and radiators are face-fixed to boxing. See OTH-PUR-TH-ZZ-DWG-A-5327 for details.

Type 15 -Replica Heritage Boxing - OTH-PUR-TH-06-DWG-A-5829

Special - Area of boxings that vary from the standard type. See relevant setting out drawings for details.

Revision 06:

1. Boxing removed from in front of niche in 02-002
2. ZE boxes removed as ZE cladding switched to MCC supply (TBC) FF&E boxing, not a joinery solution. See Arup1-EWN-000125
3. Boxing updated to meet riser wall to accommodate services in 02-019 in line with setting out drawings.
4. Boxing shortened to side wall in 02-020 in line with setting out drawings.
5. Note added to reference raised access floor to 02-023 and boxing highlighted as being 'type 2'.

Revision 07:

1. Setting out of 02-017 Perimeter boxing altered to suit position of existing door. New Perimeter Boxing now "tapers" from FCU to door opening. Refer to setting out drawing

Scale Bars to be used as guidance only - refer to sheet size below

1:100 mm	1000	3000	5000	7000	
1:200 mm	5000	8000	12000	16000	
1:500 M	5	15	25	35	
1:1250 M	10	30	50	70	90

Notes:
Drawings are based on survey data and may not accurately represent what is physically present.
Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.
All dimensions are in millimeters unless noted otherwise.
Purcell shall be notified in writing of any discrepancies.

Key Plan

To be read in conjunction with New Perimeter Boxing Type Details:
- OTH-PUR-TH-ZZ-DWG-A-5920
- OTH-PUR-TH-ZZ-DWG-A-5921
- OTH-PUR-TH-ZZ-DWG-A-5922
- OTH-PUR-TH-ZZ-DWG-A-5923
- OTH-PUR-TH-ZZ-DWG-A-5924

and Schedule:
- OTH-PUR-TH-ZZ-SCH-A-5919

These drawings illustrate the locations of boxing types and are not to be used to calculate the dimensions of perimeter boxings. They are based on ARUP schedule:
- OTH-ARU-TH-ZZ-SCH-A-0011

To be read in conjuction with New Perimeter Boxing Setting Out:
- OTH-PUR-TH-ZZ-DWG-A-5989
- OTH-PUR-TH-ZZ-DWG-A-5990
- OTH-PUR-TH-ZZ-DWG-A-5991
- OTH-PUR-TH-ZZ-DWG-A-5992
- OTH-PUR-TH-ZZ-DWG-A-5993
- OTH-PUR-TH-ZZ-DWG-A-5994
- OTH-PUR-TH-ZZ-DWG-A-5995
- OTH-PUR-TH-ZZ-DWG-A-5996 (includes type 13a and b details)
- OTH-PUR-TH-ZZ-DWG-A-5997
- OTH-PUR-TH-ZZ-DWG-A-5998
- OTH-PUR-TH-ZZ-DWG-A-5999
- OTH-PUR-TH-03-DWG-5326

For Services below FFL with Trench Heaters refer to:
- OTH-PUR-TH-ZZ-DWG-A-0620
- OTH-PUR-TH-ZZ-DWG-A-0621

To be read in conjunction with Heritage Boxing Alteration Details:
- OTH-PUR-TH-ZZ-DWG-A-5950
- OTH-PUR-TH-ZZ-DWG-A-5951
- OTH-PUR-TH-ZZ-DWG-A-5952
- OTH-PUR-TH-ZZ-DWG-A-5953
- OTH-PUR-TH-ZZ-DWG-A-5954
- OTH-PUR-TH-ZZ-DWG-A-5955
- OTH-PUR-TH-ZZ-DWG-A-5956
- OTH-PUR-TH-ZZ-DWG-A-5957
- OTH-PUR-TH-ZZ-DWG-A-5958
- OTH-PUR-TH-ZZ-DWG-A-5960
- OTH-PUR-TH-ZZ-DWG-A-5961
- OTH-PUR-TH-ZZ-DWG-A-5962
- OTH-PUR-TH-ZZ-DWG-A-5963
- OTH-PUR-TH-ZZ-DWG-A-5964
- OTH-PUR-TH-ZZ-DWG-A-5966
- OTH-PUR-TH-ZZ-DWG-A-5967
- OTH-PUR-TH-ZZ-DWG-A-5968
- OTH-PUR-TH-ZZ-DWG-A-5973
- OTH-PUR-TH-ZZ-DWG-A-5974
- OTH-PUR-TH-ZZ-DWG-A-5975
- OTH-PUR-TH-ZZ-DWG-A-5976
- OTH-PUR-TH-ZZ-DWG-A-5977
- OTH-PUR-TH-ZZ-DWG-A-5978

ISSUE	DATE	APPROVED	DRAWN	DESCRIPTION
08	28/10/2025	RS	JBA	Legend references update to suit new drawings
07	16/08/2024	AD	JBA	Update to Perimeter Boxing following Additional Works PURCELL-EWN-1215
06	08/01/2024	AD	HC	Level 02 Perim Boxing Package
05	21/10/2022	AH	AH	Key Amended
04	29/10/2021	DW	AH	Updated for Tender
03	06/08/2021	RB	MP	Updated for Tender
02	30/10/2020	RB	MP	Updated for Tender

OUR TOWN HALL PROJECT

PURCELL

Project Office, Room 308, Town Hall, MANCHESTER M60 2L1
+44 (0) 7970 097 432
www.purcelluk.com

PROJECT STATUS	RIBA STAGE 5
CLIENT	Manchester City Council
PROJECT	OUR TOWN HALL
DRAWING TITLE	Perimeter Boxing Type Location Level 02
SIZE & SCALE	A1: 1 : 200
DRAWING STATUS	FOR CONSTRUCTION
JOB NUMBER	236959
DRAWING NO. / REV	OTH-PUR-TH-02-DWG-A-0603 08

© PURCELL 2019. PURCELL ® IS THE TRADING NAME OF PURCELL ARCHITECTURE LTD.

28/10/2025 13:37:59